


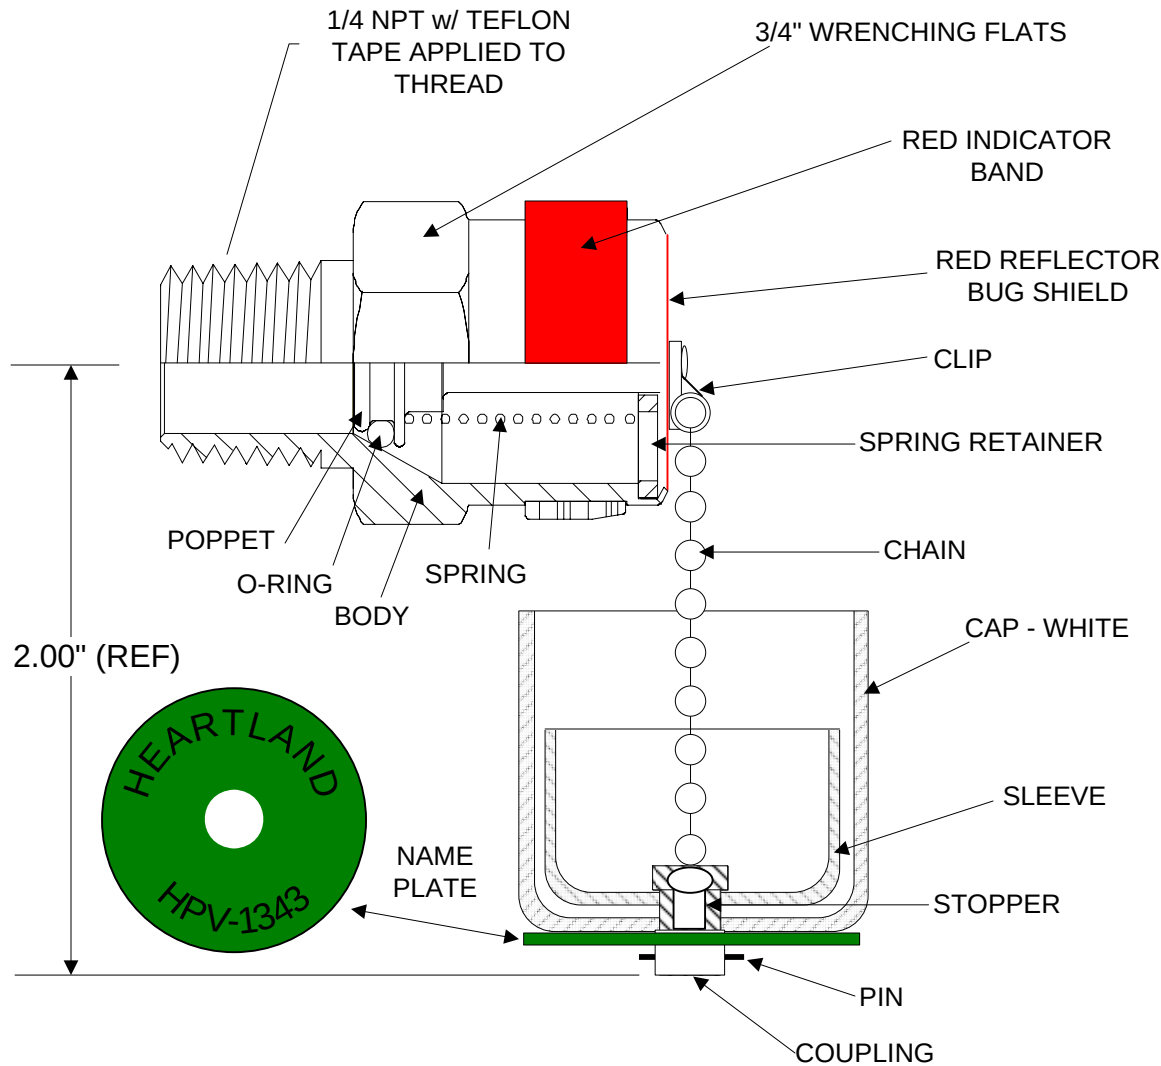

Part Description Material

Body	Brass
Indicator	UV Resistant Red Vinyl
Shield	Aluminum Anodized Red
Poppet	Brass
O-Ring	Viton
Spring	Stainless Steel
Spring Retainer	Stainless Steel
Chain	Brass
Cap	UV Resistant White Vinyl
Sleeve	Polymer
Pin	Stainless Steel
Name Plate	Aluminum Anodized Green
Clip	Stainless Steel
Coupling	Brass
Stopper	Brass
All Internal Parts	DuPont Krytox GL 205 Grease

Operation

Cracking Pressure, 10 PSIG +/- 2 PSIG
 Reseal Pressure 8 PSIG +/- 2 PSIG
 Zero Leaking from Reseal Pressure
 to -8 PSIG
 Flow Rate, 60 SCFM @ 15 PSIG @
 70 degrees F

Fluid Compatibility

Mineral Oil
 Cooper Envirotemp FR3

HPV-1343 1/4-18 NPT PRESSURE RELIEF VALVE

REVISION
03

SCALE: NONE

REVISION DATE:
27 MAR 2009

HEARTLAND SOLUTIONS, INC.

DRAWING NO.

PH: 800.957.3493 FAX: 877.779.4567

HPV-1343

info@hland.com

www.heartlandsolutionsinc.com