





SOLUTIONS, INC.

<u>Part Description</u>	<u>Material</u>
Body	Brass
Indicator	UV Resistant Red Vinyl
Shield	Aluminum Anodized Red
Poppet	Brass
O-Ring	Viton
Spring	Stainless Steel
Spring Retainer	Stainless Steel
Chain	Brass
Cap	UV Resistant Red Vinyl
Sleeve	Polymer
Pin	Stainless Steel
Name Plate	Aluminum Anodized Green
Clip	Stainless Steel
Coupling	Brass
Stopper	Brass
All Internal Parts	DuPont Krytox GL 205 Grease

Operation
 Cracking Pressure, 10 PSIG +/- 2 PSIG
 Reseal Pressure 8 PSIG +/- 2 PSIG
 Zero Leaking from Reseal Pressure
 to -8 PSIG
 Flow Rate, 50 SCFM @ 15 PSIG @
 70 degrees F

Fluid Compatibility
 Mineral Oil
 Cooper Envirotemp FR3

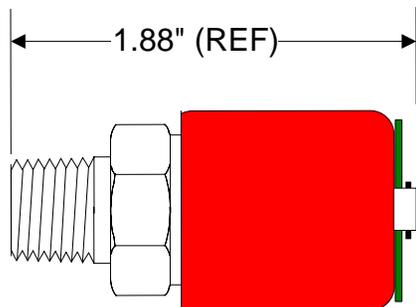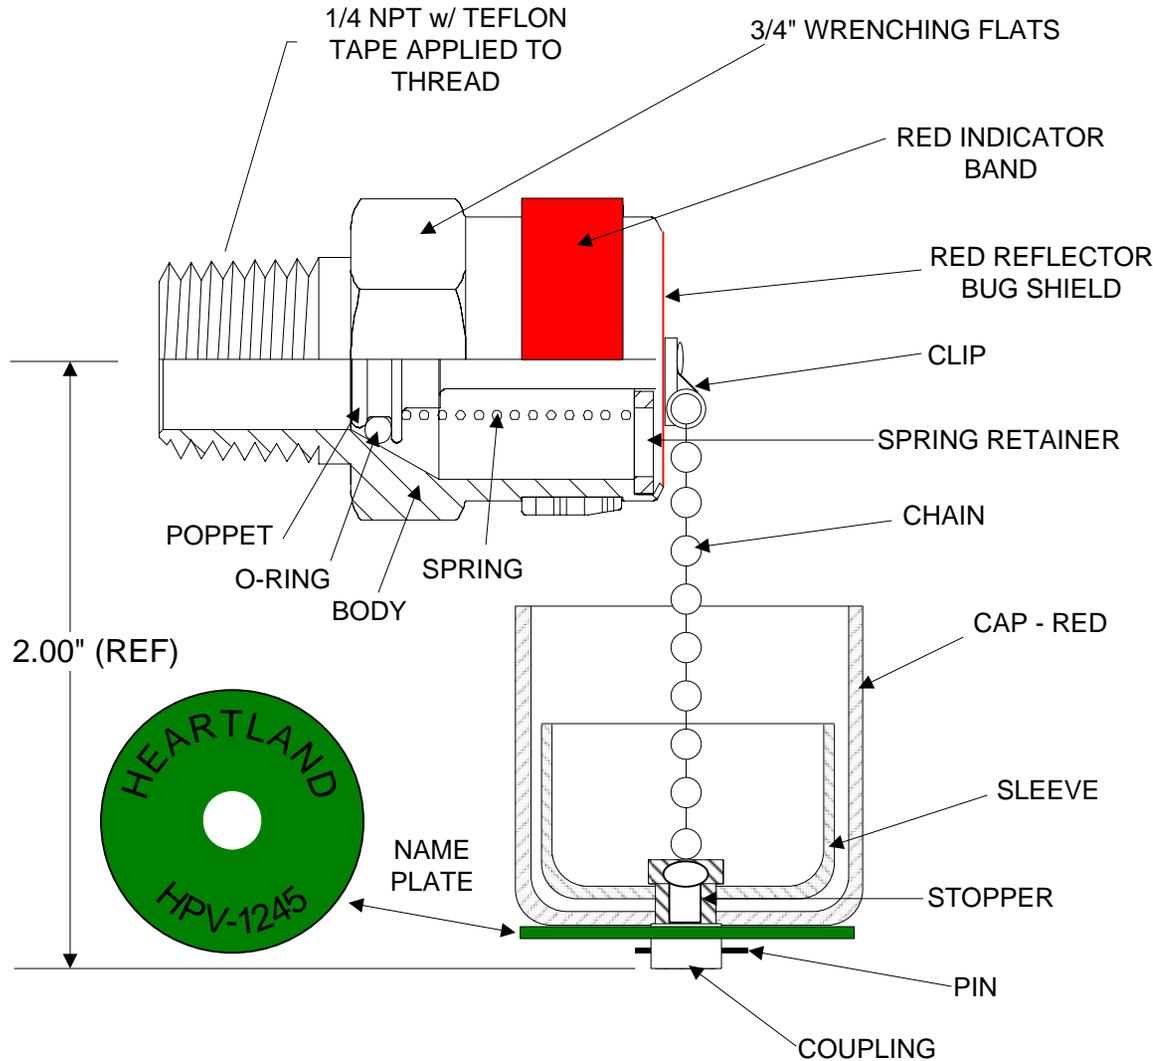

HPV-1245 1/4-18 NPT PRESSURE RELIEF VALVE		REVISION 03
SCALE: NONE		REVISION DATE: 27 MAR 2009
HEARTLAND SOLUTIONS, INC.		DRAWING NO. HPV-1245
PH: 800.957.3493 FAX: 877.779.4567		
info@hland.com	www.heartlandsolutionsinc.com	